


# OMNIKEY® 5127CK Reader Board

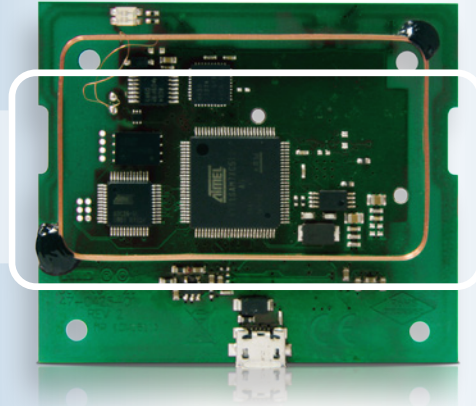

## EMBEDDED CCID AND KEYBOARD WEDGE RFID READER BOARD

- **CCID Support** – Eliminates the requirement to install drivers on standard operating systems
- **Keyboard Wedge Support** – Retrieves data from a card and forwards the information directly to an application by emulating keyboard strokes
- **Rapid and Easy Integration** – Developer Tool Kit allows rapid and easy integration of the reader board
- **Dual Frequency** – Allows straightforward migration by simultaneously supporting low and high frequency credentials including HID Prox®, iCLASS®, MIFARE™ Classic and MIFARE™ DESFire™ EV1

HID Global's OMNIKEY 5127CK reader board opens new market opportunities for system integrators seeking simple integration and development of readers using standard interfaces such as CCID (Circuit Card Interface Device). This built-in feature enables integrators to design finished readers without needing to install or maintain drivers, eliminating complex software lifecycle management issues in the field and accelerating introduction of finished devices in the market. These devices are commonly used in printers, copiers, vending machines and access control systems.

With the keyboard wedge functionality, users of OMNIKEY 5127CK readers can retrieve data from a card that is presented to the reader and directly input the card data into an application using keystroke emulation. This eliminates the need for customers to manually enter the card data into an application. The OMNIKEY 5127CK reader board offers the

market proven OMNIKEY reader feature set, supporting low and high frequency technology within a single device that enables credential migration projects to disburden the environment in mixed credential technology scenarios.

Key features of the OMNIKEY 5127CK reader board include support for the most common low and high frequency card technologies, including iCLASS, MIFARE and HID Prox. It also includes an integrated management tool that enables field updates to readers for new firmware or changing configuration settings.

For quick and easy integration, HID Global provides a Developer Tool Kit (DTK) for the OMNIKEY 5127CK reader board. The DTK provides the necessary tools, documentation and developer resources material to shorten integration cycles and speed time to market with finished products.

## FEATURES:

### CCID Support

- Native CCID implementation supporting WINDOWS®, LINUX® and MAC® operating systems

### Keyboard Wedge

- Fully configurable and programmable keyboard wedge functionality featuring an integrated management console
- Flexible configuration of data structures and output modes

### Broad Credential Support

- Dual frequency functionality allowing support for both low and high frequency credentials simultaneously
- iCLASS®, HID Prox®, MIFARE™ Classic, MIFARE™ DESFire EV1™

### Enhanced Lifecycle Management


- Easy firmware updates and configuration setting by utilizing a Web interface and SNMP messages

### OK 5127CK Developer Toolkit (DTK)

- Provides a complete set of tools and resources for immediate development
- Includes a reader, sample cards and documentation to accelerate the development process and to accelerate time to market with finished products.

### Expanded ecosystem of Genuine HID™ solutions

- Enables developers to easily bring embedded solutions to market and become part of the Genuine HID technology ecosystem.

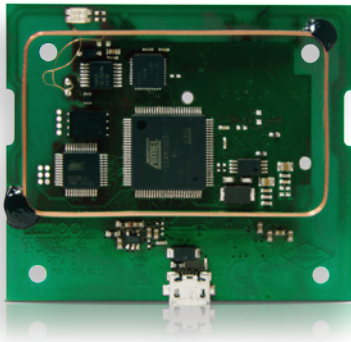

## SPECIFICATIONS

<b>Base Model Number</b>	OMNIKEY® 5127 CK, R51270001-1
<b>Dimensions</b>	2.6" x 2.2" x 0.35" (66 mm x 56 mm x 9 mm )
<b>Weight</b>	Approx. 0.49oz (14 g)
<b>Power Supply</b>	Bus powered
<b>Operating Temperature</b>	32° - 122° F (0° - 50° C)
<b>Operating Humidity</b>	10 - 90% Relative Humidity
<b>Storage Temperature</b>	-4° - 149° F (-20° - 65° C)
<b>HOST INTERFACE</b>	
<b>Host Interface</b>	USB 2.0 (also compliant with USB 1.1)
<b>Transmission Speed</b>	12 Mbps (USB 2.0 full speed)
<b>CONTACTLESS SMART CARD INTERFACE</b>	
<b>Cards &amp; Protocols High Frequency</b>	MIFARE™ Classic 1K / 4K, Ultra Light, Ultra Light C, Plus, MIFARE™ DESFIRE™ 0.6, MIFARE™ DESFIRE™ EV1, iCLASS® ISO 14443 A with up to 848 kbps transmission rate (depending on card <sup>1</sup> ), iCLASS® ISO 15693 with up to 26 kbps transmission rate (depending on card)
<b>Cards &amp; Protocols Low Frequency</b>	HID PROX®
<b>Supported APIs</b>	PC/SC (ready for 2.01, in CCID mode), Human Interface Device (in Keyboard Wedge Mode)
<b>Driver Support</b>	Compliant with native Human Interface Drivers (in Keyboard Wedge Mode) Compliant with native CCID drivers (in CCID mode) HID proprietary PC/SC drivers available for Windows® XP, Vista, 7, 2008, 2008 R2 (all 32 bit/64 bit), HID proprietary drivers available for Linux® operating systems (32/64bit): Debian 6.0, Fedora 15, OpenSUSE 11.4, Ubuntu 11.04, Mac® OSX 10.5/10.6/10.7
<b>Status Indicator</b>	Dual color LED (green=ready, red=busy) Buzzer (programmable)
<b>Connector Cable</b>	Micro USB connector (cable not included)
<b>Approvals / Environmental</b>	Compliant to ROHS/REACH, WEEE, IEC 60950-1, CE, FCC Modular, IC (Canada)
<b>Warranty</b>	Two year manufacturer's warranty

<sup>1</sup>424 kbps default data rate, 848 kbps configurable through web interface

North America: +1 949 732 2000  
Toll Free: 1 800 237 7769  
Europe, Middle East, Africa: +49 6123 791 0  
Asia Pacific: +852 3160 9800  
Latin America: +52 55 5081 1650

[hidglobal.com](http://hidglobal.com)

## ASSA ABLOY

An ASSA ABLOY Group brand

© 2012 HID Global Corporation. All rights reserved. HID, the HID logo, OMNIKEY and the OMNIKEY logo are trademarks or registered trademarks of HID Global in the U.S. and/or other countries. All other trademarks, service marks and product or service names are trademarks or registered trademarks of their respective owners.  
2012-02-20-omnikey-5127-ck-reader-board-ds-en